



LED POOL & FOUNTAIN LIGHTING

PRODUCT CATALOGUE 2026

IP68

CE

12-24V DC

LIGHT ENGINEERED FOR WATER

Brillamp offers stainless-steel LED luminaires for swimming pools, ornamental pools, fountains, waterfalls, water curtains and decorative water systems. The range brings together adjustable, surface-mounted and recessed formats with model-dependent optical, single-colour, RGB and control configurations.

IP68

Selected pool and fountain models

304 / 316

Stainless-steel body options

SINGLE / RGB

Model-specific configurations

10°-90°

Multiple beam-angle options

PRODUCT FAMILIES

- Adjustable Fountain Spotlights
- Surface-Mounted Pool Lights
- Recessed Swimming Pool Lights
- Fountain Ring Lights
- Flange & Dry-Deck Fountain Lights
- Waterside & Architectural Lighting

Adjustable Fountain Spotlight

3 W RGB



BL-FS03

IP68

CE

12-24V DC

Adjustable stainless-steel spotlight for ornamental pools, fountain systems and water jets.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT	1.05 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountains | Water features

Adjustable Fountain Spotlight

6 W RGB



BL-FS06

IP68

CE

12-24V DC

Adjustable stainless-steel spotlight for ornamental pools, fountain systems and water jets.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT	1.05 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountains | Water features

Adjustable Fountain Spotlight Range

9 W / 12 W / 18 W / 36 W RGB



BL-FS SERIES

IP68

CE

12-24V DC

Adjustable stainless-steel spotlight range for ornamental pools, fountain systems and water jets. Power and current correspond in ascending order.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 2.1 / 2.1 / 4.2 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountains | Water features

Fountain Ring Light Range

6 W / 9 W / 12 W / 18 W RGB | 38 MM HEIGHT



BL-FR SERIES

IP68

CE

12-24V DC

Stainless-steel ring-format range. Diameters by power: 145 / 155 / 168 / 177 mm.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 / 2.1 A

LIGHTING CONFIGURATION


Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Fountain nozzles | Water jets | Ornamental pools | Water features

Surface-Mounted Pool Light Range

18 W / 24 W / 36 W RGB | 210 / 230 / 250 MM

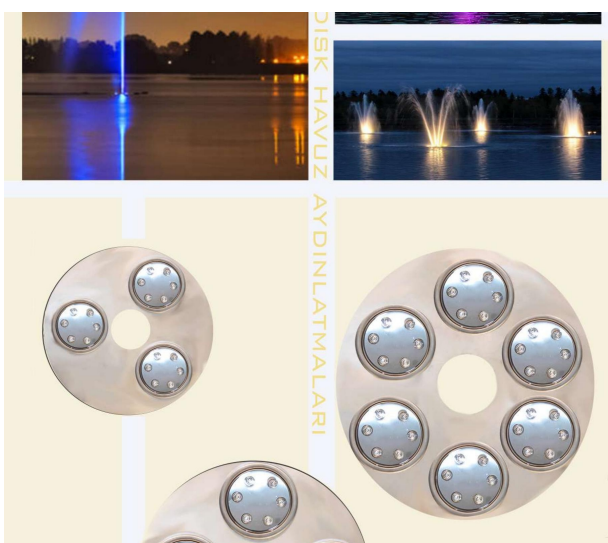

BL-PD SERIES

IP68

CE

12-24V DC

Stainless-steel disc luminaires. Power, diameter and current correspond in ascending order: 18 W / 210 mm / 2.1 A; 24 W / 230 mm / 3.15 A; 36 W / 250 mm / 4.2 A.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	2.1 / 3.15 / 4.2 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountains | Water features

Flange-Mounted Pool & Fountain Light

6 W / 9 W / 12 W RGB | 150 / 170 / 200 MM



BL-PF SERIES

IP68

CE

12-24V DC

Flange-mounted stainless-steel range with a 3 mm flange. Power, diameter and current correspond in ascending order.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountains | Water features

Recessed Dry-Deck Fountain Light

6 W / 9 W / 12 W RGB | 30X30 / 40X40 / 50X50 CM



BL-DF SERIES

IP68

CE

12-24V DC

Square dry-deck fountain range with a 3 mm stainless-steel grille. Power, size and current correspond in ascending order.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 A

LIGHTING CONFIGURATION


Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Dry-deck fountains | Interactive fountains | Public spaces | Water features

Recessed Swimming Pool Light

3 W / 9 W / 18 W RGB | 70 / 180 / 220 MM

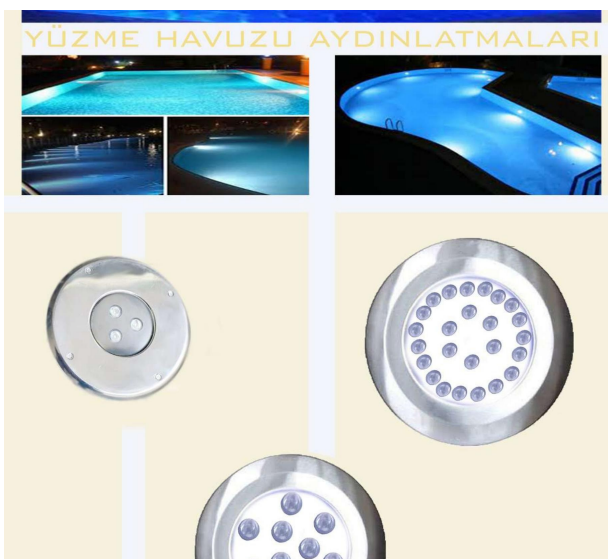

BL-RP SERIES

IP68

CE

12-24V DC

Recessed 316 stainless-steel pool light range. Power, diameter and current correspond in ascending order. Housing depth: 80 mm for 3 W; 28 mm for 9 W and 18 W.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 A

LIGHTING CONFIGURATION


Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Swimming pools | Ornamental pools | Fountain systems

Yacht & Marine Lighting

3 W / 6 W / 9 W / 12 W RGB

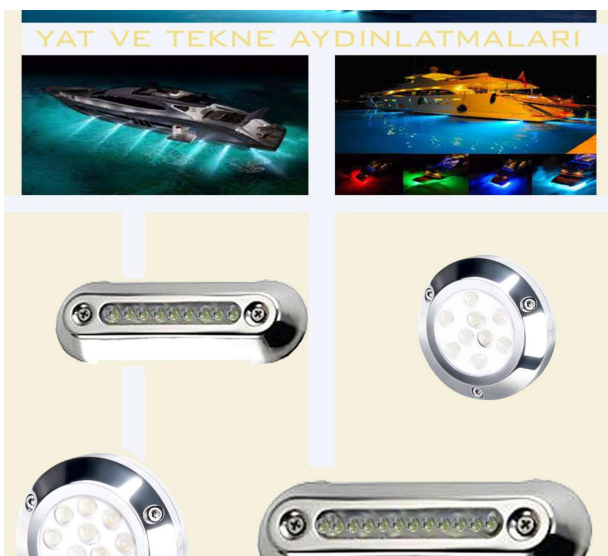

BL-ML SERIES

IP68

CE

12-24V DC

Round and linear stainless-steel luminaires for yacht and marine lighting. Power and current correspond in ascending order.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 1.05 / 2.1 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Yachts | Marine lighting | Selected exterior applications

In-Ground & Tree Lighting

3 W / 9 W / 18 W / 36 W RGB



BL-IG SERIES

IP68

CE

12-24V DC

Recessed linear and round variants with stainless-steel or aluminium lower housings. Linear lengths: 150 / 300 / 520 / 1,000 mm.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 / 4.2 A

LIGHTING CONFIGURATION


Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Ground lighting | Tree lighting | Landscape areas

Architectural Wall Lighting

3 W / 9 W / 18 W / 36 W RGB

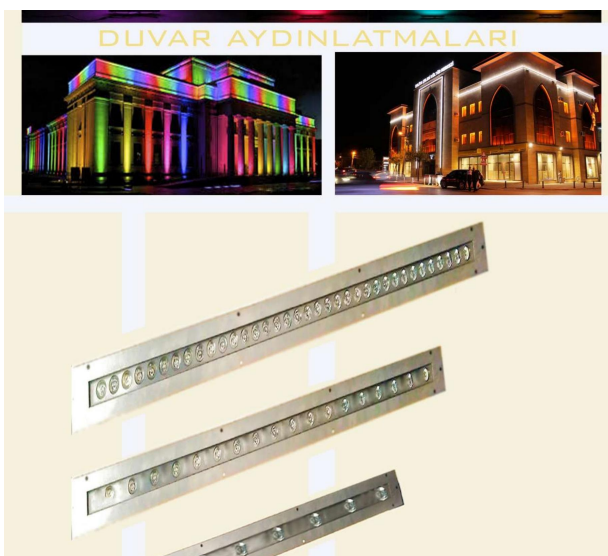

BL-WL SERIES

IP68

CE

12-24V DC

Linear stainless-steel wall luminaires. Power, length and current correspond in ascending order: 150 / 300 / 520 / 1,000 mm.

LED CONTROL	RGB / DMX
INPUT VOLTAGE	DC 12-24 V
BODY MATERIAL	304 / 316 stainless steel
LENS ANGLES	10° / 30° / 45° / 60° / 90°
CABLE	1 m
DECLARED LIFETIME	5,000 h
WARRANTY	1 year
CURRENT BY POWER	1.05 / 1.05 / 2.1 / 4.2 A

LIGHTING CONFIGURATION

Single-colour and RGB configurations are available according to model and order requirements.

APPLICATIONS

Façades | Architectural walls | Exterior lighting

LET WATER COME TO LIGHT.

Product selection, project support and export enquiries



WEB

www.brillamp.com



EMAIL

info@brillamp.com



PHONE & WHATSAPP

+90 507 639 53 83



LOCATION

Ankara, Türkiye